


SCREENING RANGE

COLT 600

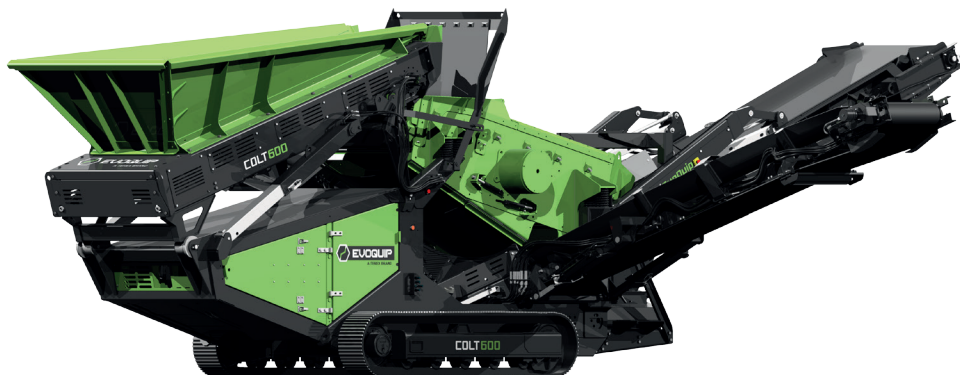

FEEDER

3m³ (3.9yd³) Hopper capacity

1m (40") Wide

Variable speed

Maximum feed size: 300mm (12")

SCREEN

2.34m x 1.17m (8' x 4') Double deck screen

Wide range of screen media

Top deck - Bofor Deck, Fingers, Punch Plate & Mesh;

Bottom Deck - Mesh & Fingers

POWERUNIT

Tier 3: DEUTZ 2011 36.4kW/66.2Hp @2300rpm

Tier 4 Final: DEUTZ TD2.9 L4 engine (45kW / 56hp @ 1900rpm)

Ultra Low fuel consumption with optimised hydraulics

OUTPUT POTENTIAL

Up to 280 tph / 308 US tph

CONVEYORS

650mm (26") Wide fines conveyor with 2.9m (9'6") discharge

650mm (26") Wide midgrade conveyor with 2.8m (9'2") discharge

1000mm (40") Wide oversize conveyor with 2.7m (8'10") discharge

Variable speed on mid-grade and oversize as standard

Ability to convert to 2 way split

TRANSPORT

Containerisable

Transport dimensions

	LENGTH	WIDTH	HEIGHT
Track Unit	10.98m (36')	2.25m (7'5")	2.55m (8'4")

Weight (standard machine): 12,000Kgs (26,455lbs)